ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No 3067-Expires May 31,

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR) Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	ages.
G OWNER'S NAME	FOR INSURANCE COMPANY USE
STREET ADDRESS (Including Apt., Unit, Suite And/or Bidg, Number) OR P.O. ROUTE AND ROX NUMBER	POLICY NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	COMPANY NAIC NUMBER
TOGA PLACE DIV. 3	
SECTION B. ELOOP MISTER	O SCOOR SID COOR
2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX	
7. Indicate the elevation datum system used to the Sinus.	6 BASE FLOOD ELEVATION IN AO Zones, use depth)
For Zones A or V. where no BFE is provided on the FIRM for Base the community's BFE: feet NGVD (or other FIRM) for Base the community's BFE: feet NGVD (or other FIRM) for Base the community is BFE: feet NGVD (or other BASE) for BFE: feet NGVD (or other BASE) for BFE: feet NGVD (or other BASE) feet NGVD	Other (describe on back)
1. Using the Elevation Certificate Instructions, indicate the Elevation (NFORMATION)	
The top of the reference level floor from the si	on Pages 5 and 6 that best Plected diagram is at an elevation
(b). FIRM Zones V1-V30. VE. and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram. Is at an elevation of	the reference level from
below (check one) the highest grade adjacent to the building.	ieet above or
(d). FIRM Zone AO. The floor used as the reference level from the selected diagram is	ve or below (check
3. Indicate the elevation datum system used in determining the above reference level elevations (NOTE: If the elevation datum system) is above reference level elevations.	Unknown Unknown
the FIRM (see Section B. Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.)	If than that used on
4. Elevation reference mark used appears on FIRM: Ves No (See Instructions on Page 4)	
Will be required once construction is based on: Lactual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the references this certificate will only be valid for the building during the course of construction. A post-will be required once construction.	r in place, in which
adjacent to the building is: $\ell 95$	other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
e community official responsible for verifying building eat the "lowest floor" as defined in the community's flood as defined by the ordinance is:	ed in Section C, Item 1 building's "lowest
Date of the	

FEMA Form 81-31, MAY 90

Date of the start of construction or substantial improvement

feet NGVD (or other FIRM datum-see Section B. Item 7).

SECTION E CERTIFICATION


certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE. AH, A (with BFE),V1-V30.VE, and V (with BFE) is required.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Features (1868) (1868) (1868) (1869) (1860) (1869) (1869) (1869) (1869) (1869) (1869) (1869) (1869) (1869

Copies should be made of this Ceんtificate for: れ community official, 2) insurance agent/company, and 3) building owner. SIGNATUR ADDRESS TITLE CERTIFIER'S NAME l certify that the information in Sections B and C on this certificate represents my best efforts to interpole I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Coppe A PARTY RILDINEN SURVEYING BIVALUE. 8506 - 59th AVE. E. E. RIPINEN JR. P. S 777 COMPANY NAME LICENSE NUMBER (or るよろ NOH NOH PHONE A CHARLES SOUNT TONO CASE OF 12 CO

COMMENTS:

0 ななが

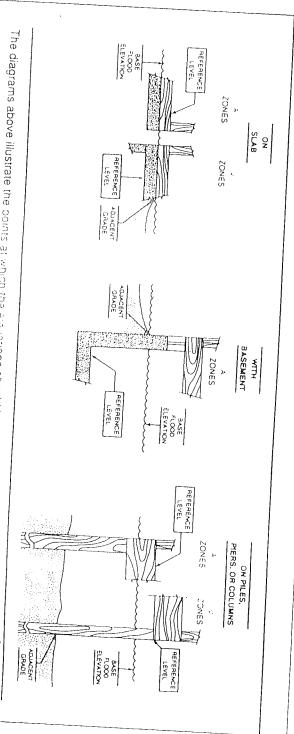

Elevations for all A Zones should be measured at the top of the reference level floor. The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.